



WISI VALUE LINE


VX 26 H

Local feed distribution amplifier
F glands

VX 29 H

Remote feed distribution amplifier
PG11 glands

WISI
Q-Step



- Very compact housing
- Rotary switches for attenuator and equalizer
- All settings without interruption of service
- Precise and readable alignments
- On board return path active / passive
- Output splitter optional

Safety instructions!


Services and repairs should only be carried out by experts.
Pay attention to live parts or wires!

Notice: In case the amplifier will be installed outdoor, please provide sufficient weather protection according the local power authorities requirement.




CE

VX 26 H - F glands

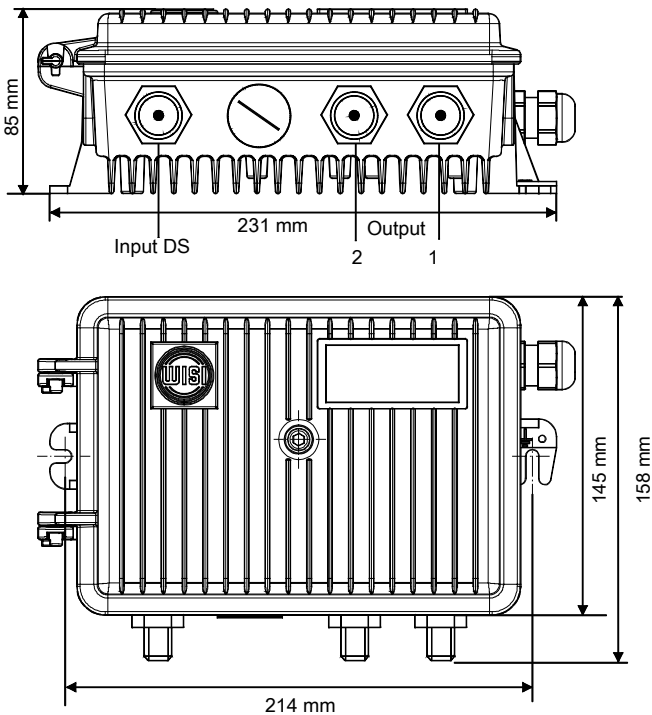

VX 29 H - PG 11 glands

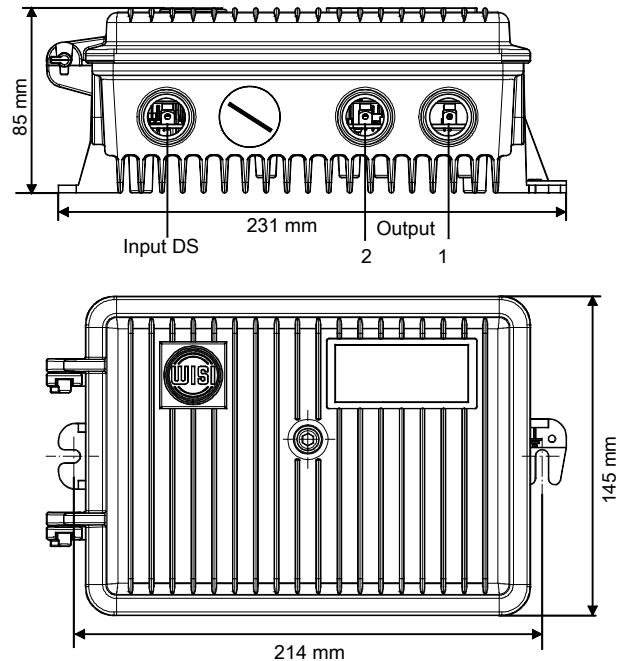


VX 29:
Kabelverschraubung PG 11 und
Netzteilanschlussstecker optional
erhältlich XE 29!
*Cable gland PG 11 and power
supply plug optional XE 29!*

Initialisation

Initialisation

1. Loosen the cover screw and open the cover.
2. For VX 29...: Screw the glanded connectors into the **Input DS** and **Output 1,2** terminals.
3. For VX 29...: Screw down the inner conductors.
4. For VX 26...: insert the power plug in the AC wall outlet.
For VX 29...: Feed in remote feed voltage via fuses.
5. Adjust the amplifier with attenuator and equalizer in accordance of the level plan.
6. Close cover and tighten the cover screw.

Drilling dimensions

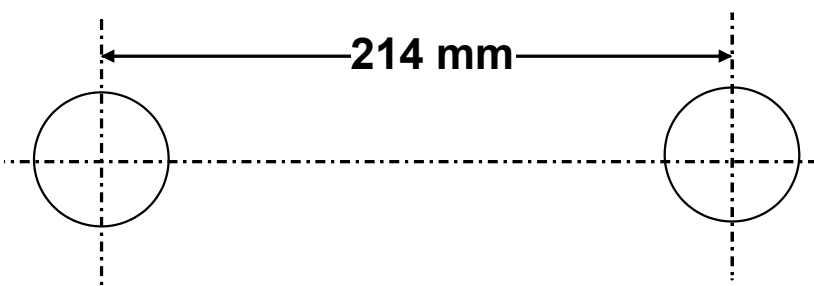

Downstream

Frequency range	85-1006 MHz	
Gain	41 dB	
Output level CENELEC 42ch,	flat	111 dBμV
	6 dB slope	114 dBμV
- CSO, CTB	≥ 60 dB	
Noise figure	up to 600 MHz	≤ 6 dB
	up to 1000 MHz	≤ 9 dB
- Attenuator	Rotary switch 16 steps per 1 dB	0-15 dB
- Equalizer	Rotary switch 16 steps per 1.5 dB	0-22.5 dB
- Interstage attenuation	(Jumper)	0 / 5 dB
- Interstage equalizer	(Jumper)	0 / 3 / 6 / 9 dB
HF output test socket	-20 dB (directional coupler)	
Input test point	-20 dB (resistive test point)	




Return path

Frequency range	5-65 MHz	
Gain (active) / passive	24 dB / -4 dB	
Noise figure	≤ 6 dB	
Output level	2nd, 3rd order	typ. 112 dBμV
- Input attenuator	1-dB-steps	0-15 dB
- Output attenuator		0-15 dB
- Interstage attenuator	(Jumper)	0 / 5 dB
- Interstage equalizer	(Jumper)	0 / 3 / 6 / 9 dB



General

Operating voltage	VX 26... VX 29...	180-265 VAC / 50/60 Hz 27-65 VAC
Power consumption		typ. 18 W
Connectors	VX 26 VX 29	F type PG 11 type
Output splitter		4 dB
Power passing	VX 29 (per port)	< 7 A
Impedance		75 Ω
Operating temperature		-20 °C...+55 °C
Storage temperature		-25 °C...+75 °C
Max. humidity, non condensing		95 %
Protection class		IP 66
Lightning protector RF connectors		4 kV ¹⁾
¹⁾ EN 61000-4-5 1.2/50 μs pulse		
Operation indicator		LED green
EMC		EN 50083-2

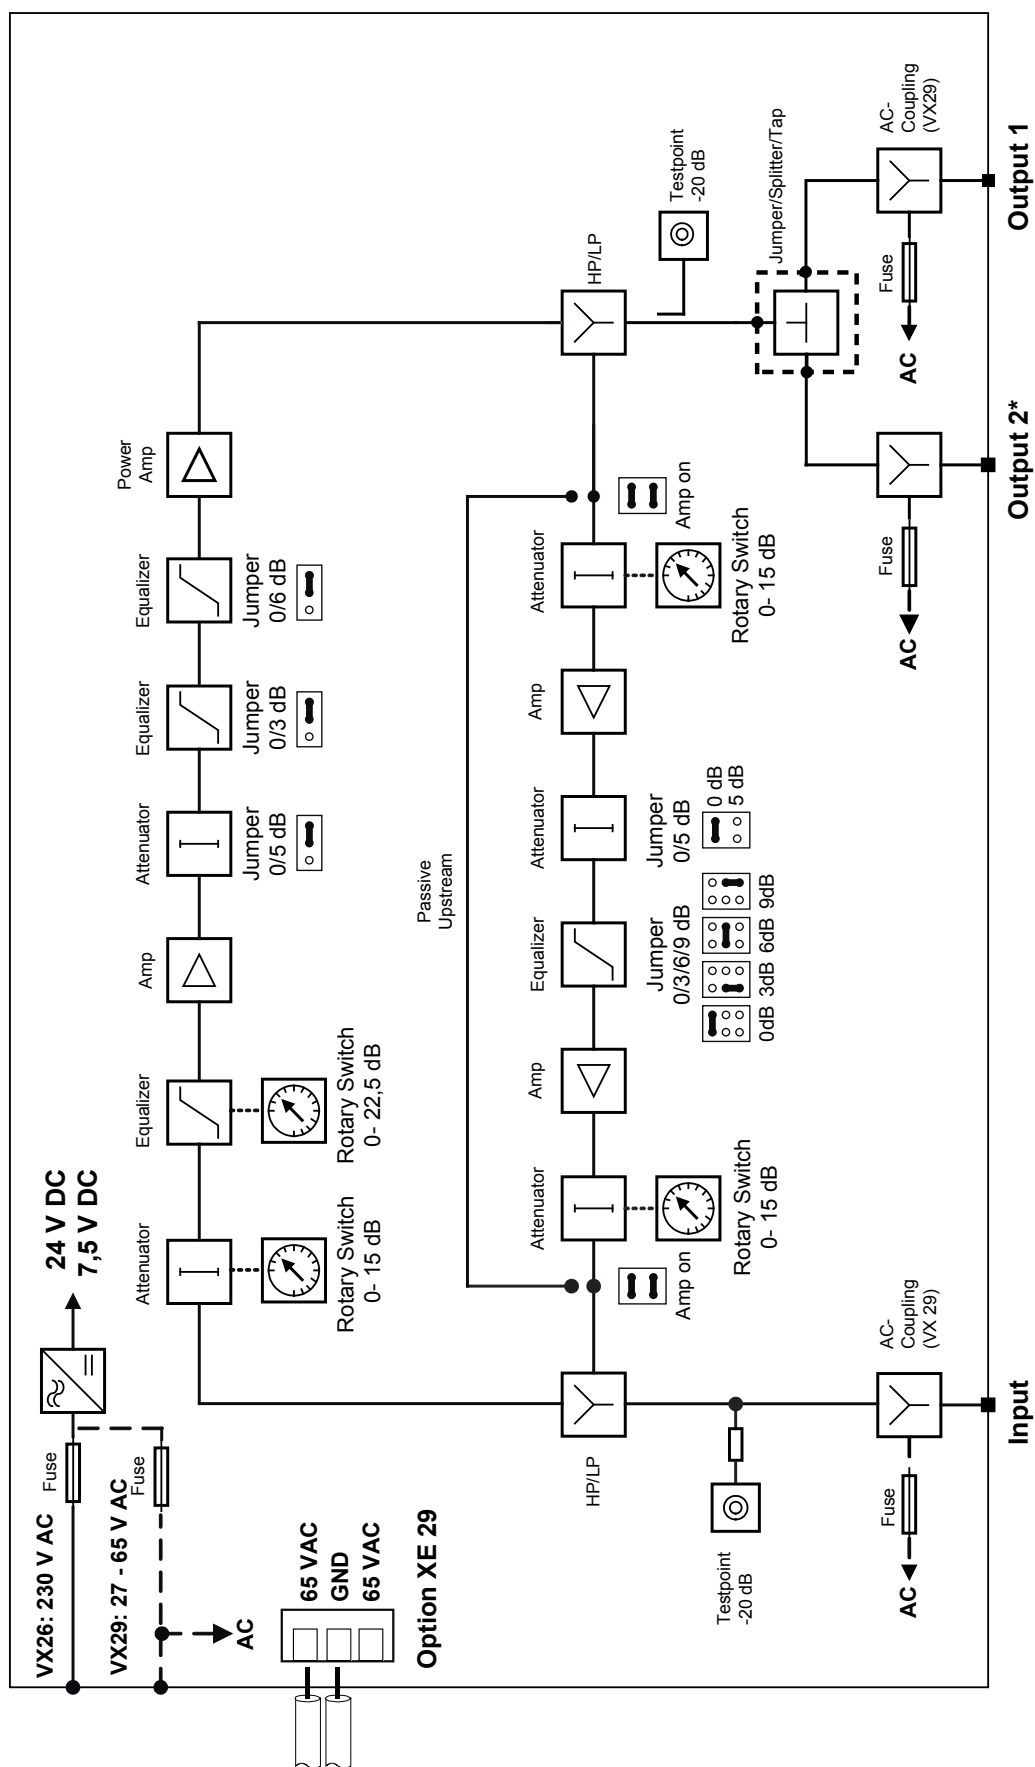

Empfangs- und Verteiltechnik

Wilhelm-Sihn-Straße 5-7, 75223 Niefern-Oeschelbronn, Germany
Tel. 07233 / 66-0, Fax. 66-320, <http://www.wisi.de>

Technische Änderungen und Druckfehler vorbehalten!
Technical Modifications reserved. WISI cannot be held
liable for any printing error.

excellence in digital ...